

Rainmaker

Quality + Reliability = Profit

Touch Free Automatic



www.hydrospray.com

It is one thing to promise technology; it is another thing altogether to deliver on the promise. The design and construction of the Rainmaker Automatic Car Wash delivers! Rotating wands results in a superior wash product by completely covering the vehicle's surface with a dynamic scrubbing action. Continuous sizing delivers a safe and quality wash process for every vehicle. Rugged design and quality components deliver an equipment package that will provide quality performance year after year with a minimum of maintenance and repair.

Goldline Plus Pay Station



\$12,995.00

Executive Series E 30



\$15,995.00

R/O System DFS-2400



\$7595.00

Spotfree System DCX-6



\$5495.00

Triple Foam System



\$1995.00

8 Section Application Sign



\$1295.00

Optional Equipment Provided by Hydrospray:

Computer or Smart Phone



Internet



Car Wash Computer Interface



Rainmaker system
\$89,995
Prices subject to change without notice

IN-BAY AUTOMATIC

The Rainmaker Computer intergration makes keeping in touch with your carwash as easy browsing the net, from anywhere!



we've been selling and servicing Hydrospray equipment for 15 years. The Rainmaker is a personal favorite of mine. With 37+ machines in the field, it has proven its reliability and wash quality over and over again

Glen Williams

Affordable Equipment

Specifications

Stainless Steel Construction

Rainmaker Tower (w/SST Frame) with the Following:

- Stainless Frame
- Wash Down Motors
- Mosmatic Stainless Swivels
- ABS Tower Cover Set (Grey & Blue)w/ Decals
- Low Profile Rubber Coated Wands w/ Nozzles
- Centralized Grease System
- Stainless Quick Release Latches for Easy Removal of ABS Tower Covers for Maintenance
- High Pressure Nozzle Kit
- Extra Tube of Grease

Rainmaker Bay Components as Follows (Per Bay)

- Undercarriage, Wheel Wash w/ Control Valve
- Dual Treadle Switch
- Entry Switch
- Auto Bay Signage (Fold in Mirrors, Attn Direction 24x36, Wash Menu 24x36)
- 3-Direction Traffic Sign (Drive Forward, Stop, Back-Up)
- Control Cables (3 @55Ft in length) to Adjustable Carriage from Equipment Room to bay (Side by Side Configuration Only) see options when additional length is required
- Auto Bay Hose Package (Next to Equipment Room)
- Stainless Steel Check Valve Assy
- Electric Center Pod

Rainmaker Pumping Unit as Follows

- Stainless Steel Modular Pumping Unit Frame 30x30
- 25HP Motor 208-230 VAC, 3 PH
- General Pump HTK 4050 Emperor Series (optional CAT Pump)
- Plastic Rinse Tank
- Plastic Product Tank
- Cold Water Rinse Option w/ Control Valve
- Stainless Steel Chemical Delivery Pump (Direct Inject)
- Air Assist Panel Mount
- Soap Manifold
- Low-Water Cut Off Control
- PLC Controlled w/ Touch Screen
- Pre Assembled & Pre Wired
- Low Pressure Functions: Presoak 1, Presoak 2, Low Pressure Wax, Clear coat Protectant, Tri-Foam, & Tire Cleaner (Spot Free Rinse Optional)
- New & Improved Chemical Delivery System utilizing Chemical Injection, Compact Design, Easy Maintenance & Added Reliability

Rainmaker Adjustable Track as Follows

- New & Improved Stainless Steel Construction Carriage & Track
- Wall Mounted Support Structure w/ Stainless Adjustable Hardware J-Hooks and Rails, /Galvanized 3x5 Support Beam
- Preassembled Stainless Steel Carriage
- Slip Ring Assy. Scissor Pipes Hoses and Swivels
- Stainless Wash Down Motors

Rainmaker

Water Consumption

- HP Pump 26gpm
- LP Pump 7gpm
- HP Pass 13.0 gallon per pass (average 24/30 sec pass)
- LP Pass w/.086 soap injector 1.25 gallon per pass (average 24/30 sec pass)

Example: 5 pass wash

- Number of High pressure passes $2 \times 13.0 = 26$ gal
- Number of High pressure wheel/undercarriage $1 \times 9.0 = 9$ gal
- Number of low pressure passes $2 \times 1.25 = 2.50$

Total for this example: 37.50 us gal

**spot free rinse not included*


Example: 6 pass wash

- Number of High pressure passes $2 \times 13.0 = 26.0$ gal
- Number of High pressure wheel/undercarriage $1 \times 9.0 = 9.0$ gal
- Number of low pressure passes $3 \times 1.25 = 3.75$ gal
- Total for this example: 38.75 us gal

**spot free rinse not included*

Self Serve Requirements

Minimum Bay Length	28'8"
Minimum Bay Height	11'6"
Minimum Bay Width	15'0"
Panel Minimum	200
Voltage	208/230
Amps	200 AMP
Water	35GPM
Phase	3
Circuits	2

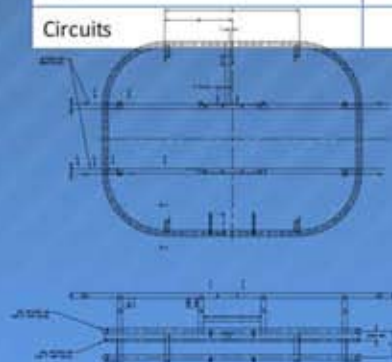

"Turn key carwash solutions you can trust"
Hydro-spray

