

Single & Triple Foam Pods™



Single Foam Pods™



Triple Foam Pods™

By foaming single chemicals, operators can improve surface coverage, adhesion and 'show' all at once – managing wash performance while enhancing the customer experience. To make this easy, Belanger's **Single Foam Pods™** feature a locking collar that mounts to virtually any component leg or top beam.

Belanger's **Triple Foam Pods™** are specifically designed for use in revenue-generating colored triple foam applications. Constructed with three separate foaming chambers, the **Triple Foam Pods™** deliver each color of triple foam individually for maximum visual impact in the tunnel.

Both the **Single Foam Pods™** and **Triple Foam Pods™** feature needle valves on the Pods themselves, for easy in-tunnel adjustment of foaming applications right at the point of delivery. Precision-drilled holes of less than $1/10$ of an inch are perfectly spaced for optimum foam dispersion and a stunning display.

All **Single Foam Pods™** and **Triple Foam Pods™** feature nearly maintenance-free construction with no moving parts, and a zero-footprint design that 'piggybacks' on existing equipment. This makes them ideal for amping up the 'wow' factor in your tunnel with minimal cost and space requirements.



Belanger Incorporated Products Specification Sheet




Belanger, Inc. reserves the right to revise specifications, features or designs, and to change or discontinue models at any time without notice or obligation. Prices subject to change without notice.

BE0062

Copyright 2018
Belanger, Inc.



Single & Triple Foam Pods™

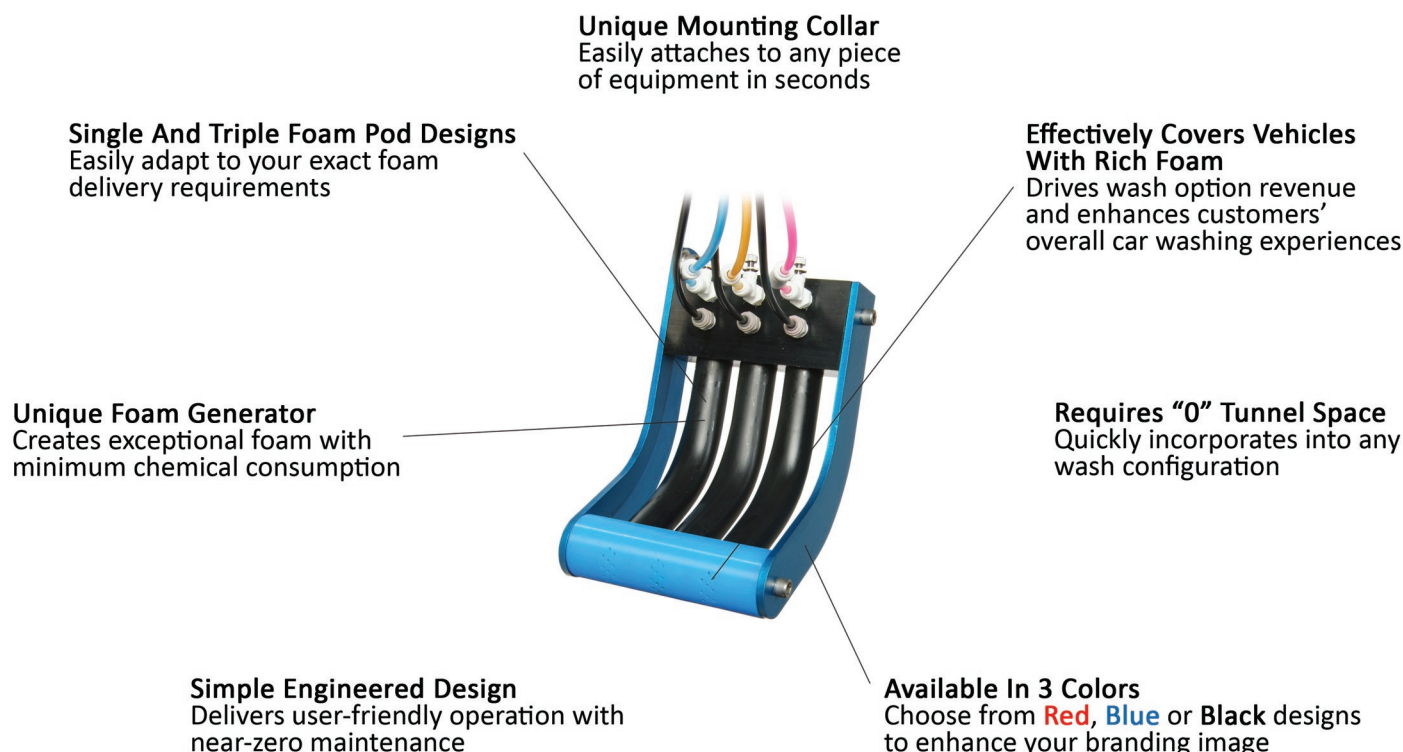

REQUIREMENTS

Physical

Unit Size **Single Foam Pod:** 12 1/2" x 3" **Triple Foam Pod:** 12 1/2" x 7 3/4"
(*May be installed on compatible pieces of wash equipment)

Utilities

Electrical Requirements	110 VAC @ 5 amps minimum, 1 or 2 Outputs
Hose Requirements	1/2" poly-flow line for main feed 1/4" poly-flow line to feed Pod (Distribution Blocks)
Pneumatic Requirements	15 SCFM @ 50 PSI air flow (minimum) to 1/2" poly-flow
Water Requirements	5 GPM fresh water feed (minimum) to 3/4" hose barb