



At 200+ vehicles per hour, Belanger's QuickFire® is the most powerful front, side, and rear vehicle washer on the market. With revolutionary features such as the patented Caterpillar Bearings and Dual Directional Travel action, this wrap accurately senses different vehicle widths for increased surface contact and outstanding wash results.

What's more, the QuickFire® accommodates every vehicle with its patented oversized socket joint, which is Built-To-Tilt™ through a full 360°, helping provide gentle yet thorough cleaning of vehicle front, side and back contours. And QuickFire® is the only wrap that follows the car for extended cleaning, even at high line speeds. Customers love the show, and appreciate the results as QuickFire chases each car, and chases dirt off of even 'harder to clean' vehicle rears.

The bottom line? The QuickFire® enables tunnel operators to process vehicles at higher line speeds without sacrificing wash quality. With the patented Dyna Trigger™, the QuickFire® "fires" across the back of the vehicle for overlapping 'taillight-to-taillight' wash coverage, effectively eliminating rear skunk striping ... no manual prepping required!



#### Belanger Incorporated Products Specification Sheet



Belanger, Inc. reserves the right to revise specifications, features or designs, and to change or discontinue models at any time without notice or obligation. Prices subject to change without notice.

BE0056

Copyright 2016  
Belanger, Inc.





**Custom Cleans Every Vehicle, Every Time**  
DynaTrigger™ senses & adjusts to vehicle widths


**Unsurpassed Contact To Clean Vertical Surfaces**  
With dual-directional drive for superior vehicle cleaning

**Washes 200+ CPH, With Highest Wash Quality**  
Industry's only 'following' wrap delivers extended rear cleaning, at every line speed

**Minimizes Potential For Damage To Vehicles**  
With dampening 360° pivot & oversized socket joint

**Overlapping Cleaning Coverage, Front & Rear**  
Eliminates 'skunk striping' with extended boom length

**Smooth Wheel Travel Throughout The Wash**  
With patented, grease-free 'caterpillar bearing' design

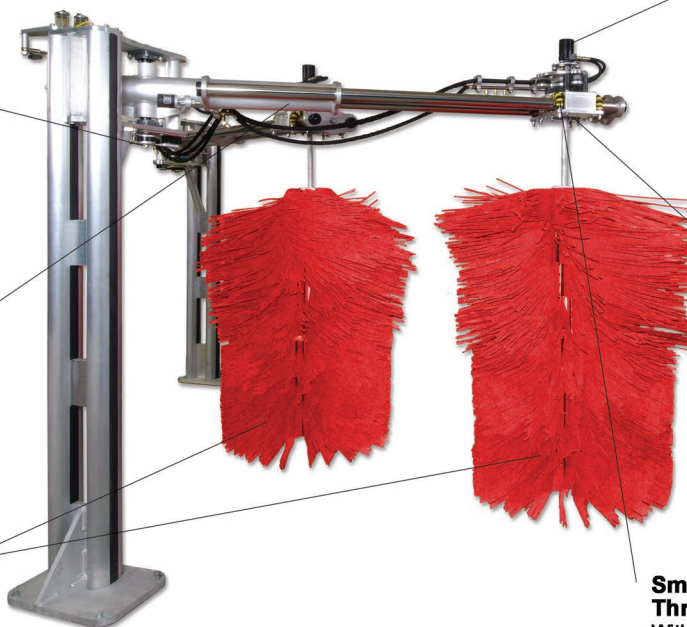

## Physical

Tunnel Space Required	10' 2 1/2"
Unit Height	10' 1"
Unit Width	12' 9"

## COLOR OPTIONS

- Choose from two vivid Neo-Tex™ wash colors



## Utilities

### Electric Drive Option:

Electrical Requirements	(2) outputs from Controller @ 120 VAC (for Extend & Retract)
	(2) 1HP, 3-Phase, 208/240/460 VAC
Pneumatic Requirements	1 CFM @ 90-PSI minimum 120-PSI maximum
Water Requirements	(2) 3/4" Hoses @ 8 GPM @ 40 PSI

### Hydraulic Drive Option:

Hydraulic Requirements	Same requirements as above plus - 6 GPM @ 900 PSI
------------------------	--